



heliforklifts.co.nz

## **OPL10-S Electric Low Level Order Picker** HELI AC EPS Characteristics • Max.lifting height of platform is 1.2m, The capacity of loading tray is 60kg. • Forward and backward control button located at the backrest of platform. • Advanced electronic steering system (EPS) handle ensures effortless and highly efficient maneuverability. • Combining of regenerative brake and electromagnetic brake provide safe and reliable brake. • Side-way battery designs is very convenient for maintenance and replacement. • USB charge device on the control panel which could charge phone, pad, et. • Advanced AC control with reliable performance is adopted on the truck. • Small turning radius and stepless speed control ensure the trucks can be used in narrow workplace. • With reasonable layout of the key components, it is convenient to maintain. • Standard with guardrail.

## OPL10-S

	Character			
.01	Manufacturer			HELI
	Model		1	OPL10-S
	Drive mode			Electric (battery)
	Driving mode			Stand-on
	Load capacity	Q	kg	1000
	Load center distance	C	mm	600
	Track	Y	mm	1300
1.07	Tyre			1300
0.01	Tyre type			Polyurethane
	Wheels number,Front/rear(X=driven wheels)			1x/2
	Track Width, rear	b11	mm	700
	Wheel size, front	DII	mm	φ250×80
	Wheel size, rear			φ250×80 φ128×73
05	Dimension		mm	Ψ120×13
		1.1		1200
	Height, mast lowered	h1	mm	1300
	Lift height of platform	h3	mm	1200
	Height, mast extended	h4	mm	2360
	Height, fork lift	h15	mm	800
	Height, fork lowered	h13	mm	70
	Overall length	l1	mm	2790
	Length to shank of forks	12	mm	1720
	Overall width	b1	mm	812
	Forksize	s/e/l	mm	35×100×1070
	Width across forks	b5	mm	200-750
	Underground clearance at center of wheel base	m2	mm	35
3.12	Aisle width with pallet 1000x1200 (1200 refers to the pallet width across the fork )	Ast	mm	3157
	Aisle width with pallet 800x1200 (800 refers to the pallet width along the fork)	Ast	mm	3178
3.14	Turning radius	Wa	mm	1535
	Performance			
1.01	Travelling speed,laden/unladen		km/h	7.7/7.8
1.02	Lifting speed,laden/unladen		m/s	0.1/0.15
1.03	Lowering speed,laden/unladen		m/s	0.07/0.08
1.04	Gradeability,laden/unladen		%	8/15
	Electrical configuration			
5.01	Drive moter power		kw	1.5
5.02	Lifting moter power		kw	2.2
	Battery capacity		V/Ah	24/450
	Battery dimensions I/w/h		mm	654x305x705
	Controller			CURTIS
	Brake			Electromagnetic brake
	Weight			Ü
5.01	Total weight (with battery)		kg	1650
_	Axle load, front/rear axle, laden		kg	944/706
	Axle load, front/rear axle, unladen		kg	500/2150



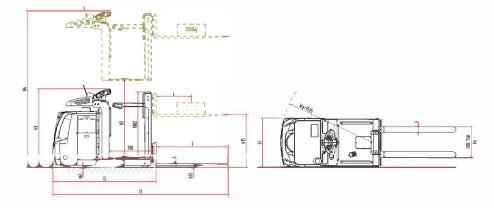



## heliforklifts.co.nz

Contact us direct or get in touch with your local dealer

0800 435 469 sales@heliforklifts.co.nz